


flexiguide

Product Specification

O-rings to connect a grooved flange to a grooved flange.

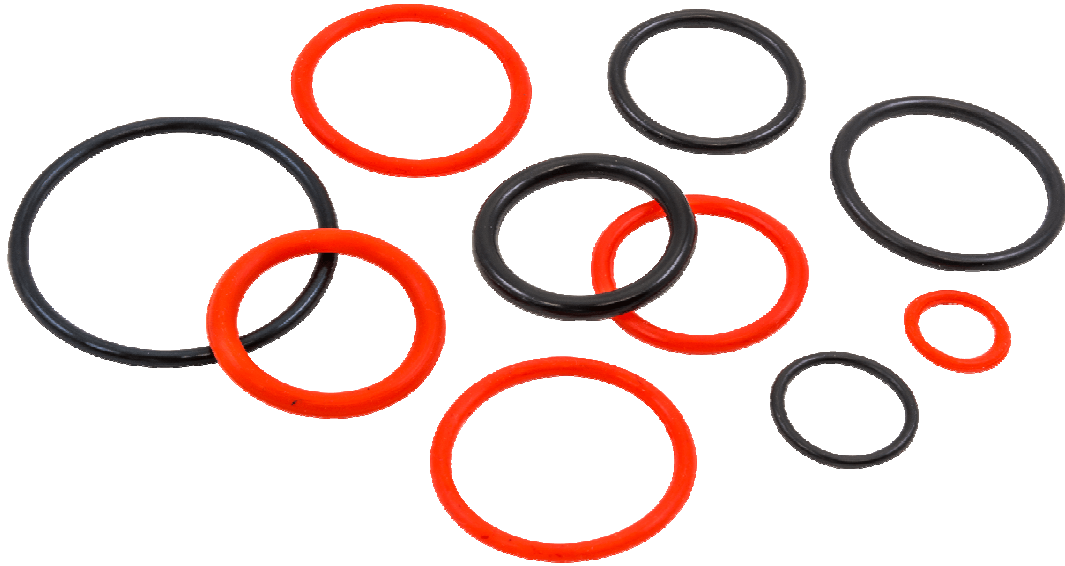

Part Number	Waveguide Size	Used with TWO Grooved Flanges
OR12A-Y-DH	WG12 / WR187 / R48	12A (UG Choke) or 12Y (UG Cover + Groove)
OR14A-Y-DH	WG14 / WR137 / R70	14A (UG Choke) or 14Y (UG Cover + Groove)
OR15A-Y-DH	WG15 / WR112 / R84	15A (UG Choke) or 15Y (UG Cover + Groove)
OR16A-Y-DH	WG16 / WR90 / R100	16A (UG Choke) or 16Y (UG Cover + Groove)
OR17A-Y-DH	WG17 / WR75 / R120	17A (UG Choke) or 17Y (UG Cover + Groove)
OR18A-Y-DH	WG18 / WR62 / R140	18A (UG Choke) or 18Y (UG Cover + Groove)
OR20A-Y-DH	WG20 / WR42 / R220	20A (UG Choke) or 20Y (UG Cover + Groove)
OR21Y-DH	WG21 / WR34 / R260	21Y (UG Cover + Groove)
OR22A-Y-DH	WG22 / WR28 / R320	22A (UG Choke) or 22Y (UG Cover + Groove)
OR23Y-DH	WG23 / WR22 / R400	23Y (UG383/U + Groove)
OR15G-K-DH	WG15 / WR112 / R84	15G (CBR84) or 15K (PBR84)
OR16G-K-DH	WG16 / WR90 / R100	16G (CBR100) or 16K (PBR100)
OR17G-K-DH	WG17 / WR75 / R120	17G (CBR120) or 17K (PBR120)
OR18G-K-DH	WG18 / WR62 / R140	18G (CBR140) or 18K (PBR140)
OR19G-K-DH	WG19 / WR51 / R180	19G (CBR180) or 19K (PBR180)
OR20G-K-DH	WG20 / WR42 / R220	20G (CBR220) or 20K (PBR220)
OR21G-K-DH	WG21 / WR34 / R260	21G (CBR260) or 21K (PBR260)
OR22G-K-DH	WG22 / WR28 / R320	22G (CBR320) or 22K (PBR320)
OR12R-W-DH	WG12 / WR187 / R48	12R (PAR48) or 12W (CAR48)
OR13R-W-DH	WG13 / WR159 / R58	13R (PAR58) or 13W (CAR58)
OR14R-W-DH	WG14 / WR137 / R70	14R (PAR70) or 14W (CAR70)

Material: Silicone Rubber

Colour: Blue