



flexiguide

Product Specification

Standard CPR Gaskets - Rubber gaskets to connect a CPR-G (grooved) flange to a CPR-F (flat) flange. Also known as Half Height Gaskets.

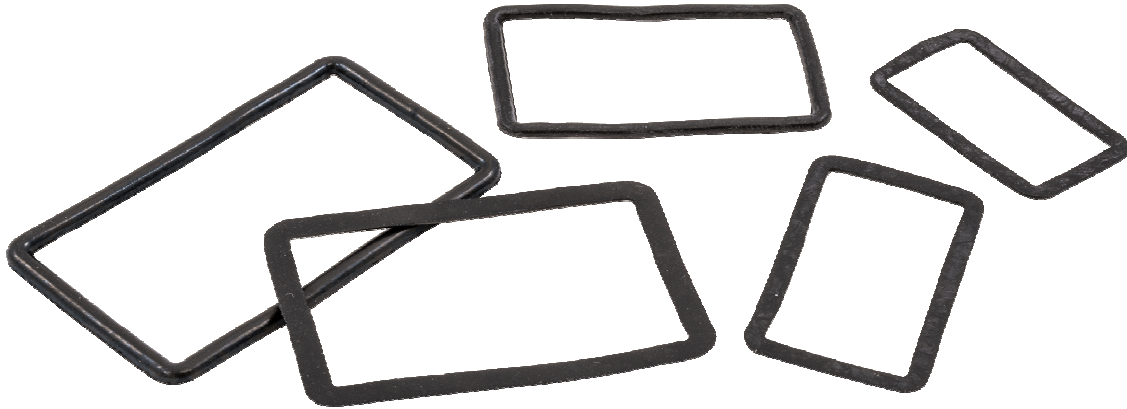

Part Number	Used with Flanges	Dimensions (mm)				Material	Colour
		ØA	B	C	D		
RG10C-SH	10C (CPR284G) mated with 10D (CPR284F)	3.53	87.66	49.56	1.77	EPDM	Black
RG11C-SH	11C (CPR229G) mated with 11D (CPR229F)	3.53	72.82	43.74	1.77	EPDM	Black
RG12C-SH	12C (CPR187G) mated with 12D (CPR187F)	3.53	62.20	36.80	1.77	EPDM	Black
RG13C-SH	13C (CPR159G) mated with 13D (CPR159F)	3.53	55.04	34.85	1.77	EPDM	Black
RG14C-SH	14C (CPR137G) mated with 14D (CPR137F)	2.62	47.40	28.35	1.31	EPDM	Black
RG15C-SH	15C (CPR112G) mated with 15D (CPR112F)	2.62	41.05	25.17	1.31	EPDM	Black
RG16C-SH	16C (CPR90G) mated with 16D (CPR90F)	2.62	34.75	22.05	1.31	EPDM	Black

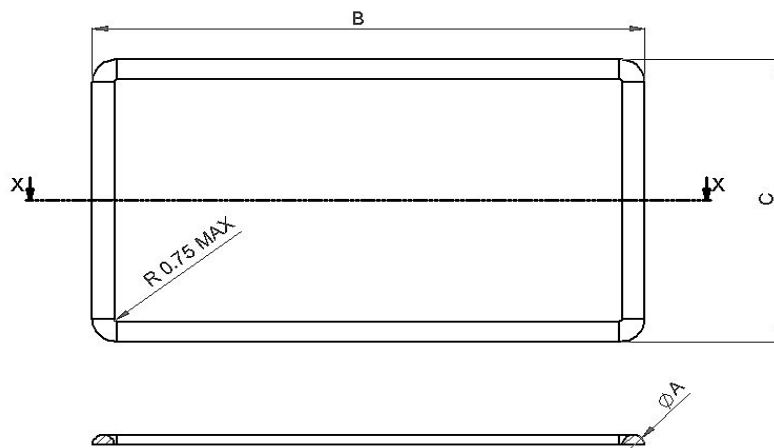

SECTION X-X

Standard Gasket
(Half Height Gasket)

